


2" SIGN POST INSTALLATION METHOD Nº 2 (12' Post)

Grass Plots; Artificial Stone, Brick, & Bituminous Concrete Sidewalk
Excavation Unlimited

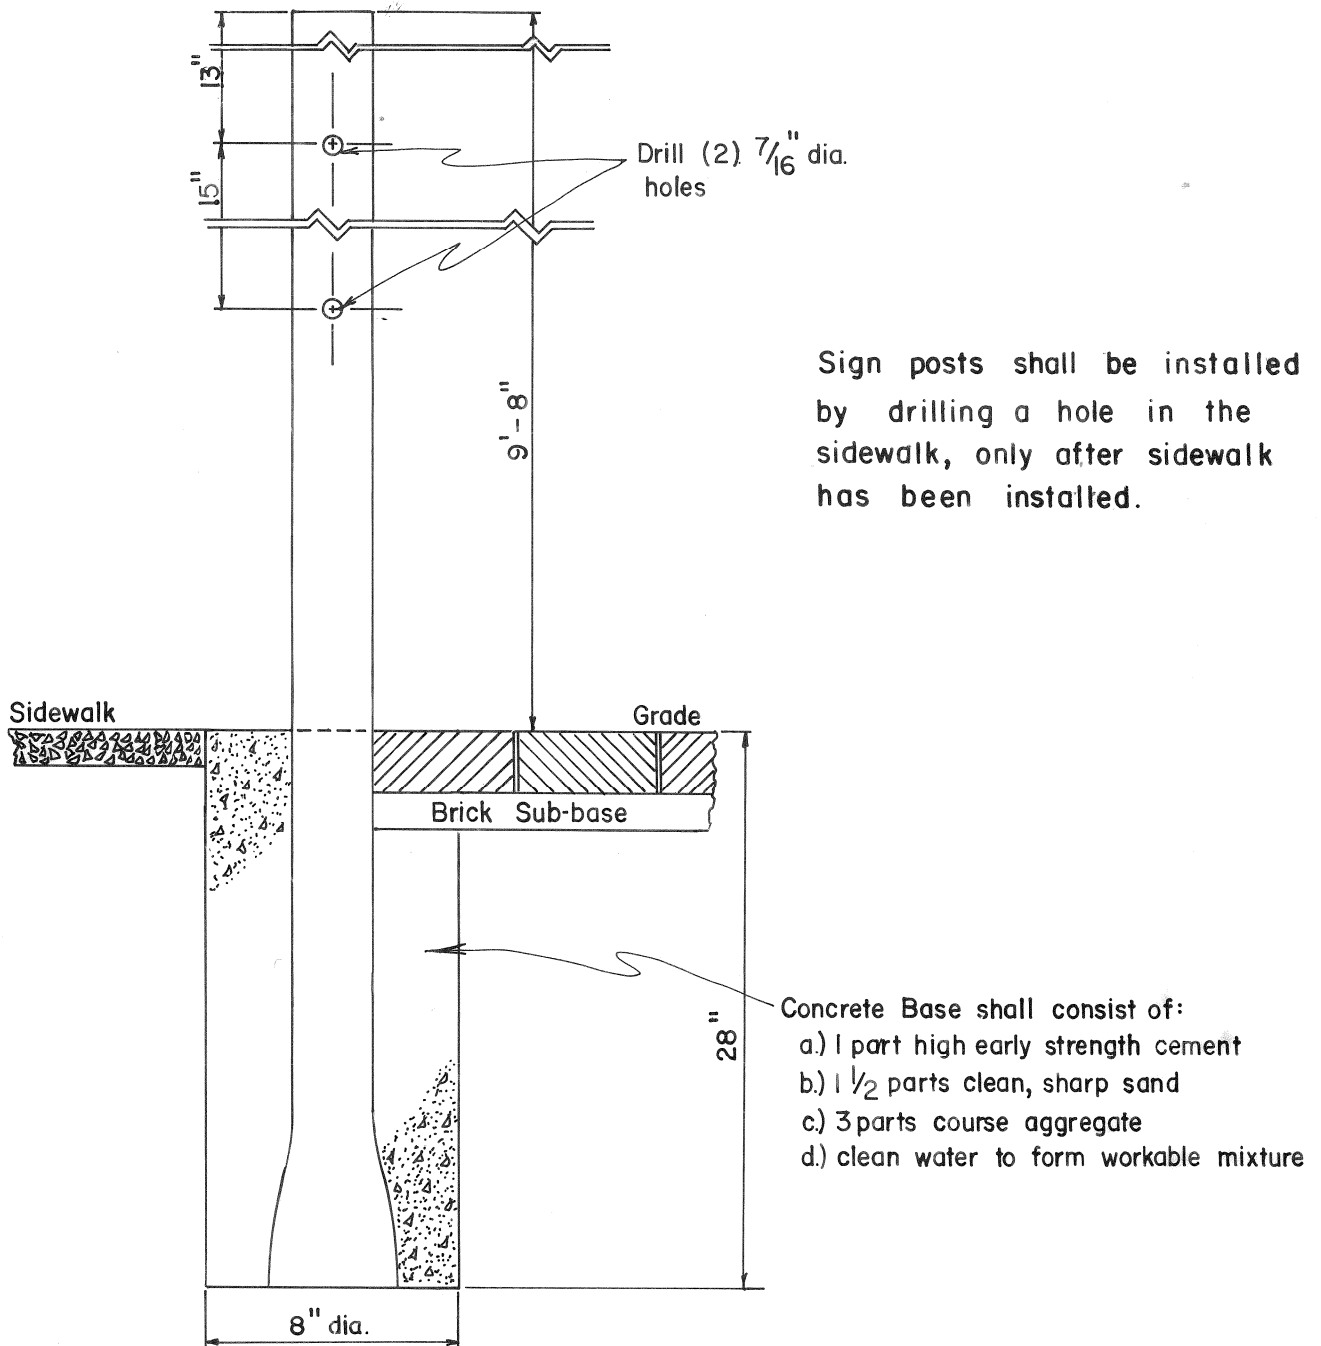

Sign posts shall be installed by drilling a hole in the sidewalk, only after sidewalk has been installed.

NOTES:

1. Sign posts to be Black Steel Pipe, 2" internal diameter, 12' long, A.S.T.M. A120 Std. Wt.
2. The bottom of each post shall be deformed to provide for anti-rotation.
3. All sign posts to be 20" o.c. from the face of curb, except when directed by the Boston Transportation Dept.
4. Signs shall set at an angle of 60° with the curb line and facing the flow of traffic, except when directed by the Boston Transportation Dept.
5. Street Name Signs shall set parallel with the curb line, except when directed by the Boston Transportation Dept.
6. Sign posts to be painted with 2 coats of Black Enamel paint.

A201

Not to Scale